
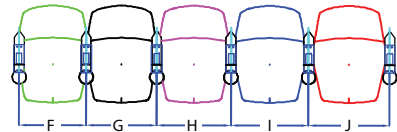


LIRA



ITEM	DIMENSIONES	
	mm	INCHES
A	910	36
B	696	27
C	564	22
D	448	18
E	595	23
F	482	19
G	508	20
H	533	21
I	558	22
J	584	23

TECHNICAL SPECIFICATIONS

- Back and seat molded in cold-injected polyurethane with a hardness of 18-20 kgf.
- Removable upholstery system, without staples or glue, with fabric or vinyl.
- Structural frame of the backrest in 18 gauge CR steel pipe, 3/4" in diameter, and 7/8" 16 gauge seat.
- Legs made with rectangular 2" x 1" 16-gauge tubing, assembled with MIG robotic welding.
- Floor anchoring plates punched in 3mm CR steel sheet with 4 holes for fixing in wood (minimum thickness of 1") or concrete (3000 PSI, minimum 5 cm).
- Structure coating in electrostatic paint, matt black color. -Wooden arms
- Seat and backrest cover in high impact black polypropylene. -Folding counterweight mechanism, soundproof and maintenance free.
- End of row legs- Fabric upholstery - Footprint anchor

OPTIONS

- Arm: HPL / Polyurethane
- Foldable / anti-panic table.
- Seat and backrest cover: Acoustic plastic / Wooden / Upholstered
- End of row legs in wooden or formic- Linear installation, on spokes or slopes
- Removable base for the disabled.

WARRANTY

- 5 years warranty on workmanship.